

PCT

WORLD INTELLECTUAL PROPERTY
International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER TI

WO 9608934A2

(51) International Patent Classification 6 :

H04Q 7/22

A2

(11) International Publication Number:

WO 96/08934

(43) International Publication Date:

21 March 1996 (21.03.96)

(21) International Application Number: PCT/GB95/02134

(22) International Filing Date: 8 September 1995 (08.09.95)

(30) Priority Data:

9418780.4

16 September 1994 (16.09.94) GB

(71) Applicant (for all designated States except US): IONICA INTERNATIONAL LIMITED [GB/GB]; Cowley Road, Cambridge CB4 4AS (GB).

(72) Inventors; and

(75) Inventors/Applicants (for US only): ALBROW, Richard, John [GB/GB]; 27 Lonsdale, Linton, Cambridge CB1 6LT (GB). BLACK, Simon, Alexander [GB/GB]; 52 Auckland Court, Auckland Road, Cambridge CB5 8DS (GB). CARTER, Leigh [AU/GB]; 50 Cantelupe Road, Haslingfield, Cambridge CB3 7LU (GB). GOODINGS, Rupert, Leslie, Alexander [GB/GB]; 33 Elizabeth Way, Cambridge CB4 1DD (GB). MARTIN, Paul, Maxwell [GB/GB]; 9 Taylors Field, Dullingham, Newmarket, Suffolk CB8 9XS (GB). PIERCY, Neil, Philip [GB/GB]; 13 Harston Road, Newton, Cambridge CB2 5PA (GB).


(74) Agent: HOGG, Jeffery, Keith; Withers & Rogers, 4 Dyer's Buildings, Holborn, London EC1N 2JT (GB).

(81) Designated States: AM, AT, AU, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TT, UA, UG, US, UZ, VN, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG), ARIPO patent (KE, MW, SD, SZ, UG).

Published

Without international search report and to be republished upon receipt of that report.

(54) Title: TRANSMISSION OF DIGITAL DATA MESSAGES IN DIGITAL TELEPHONY

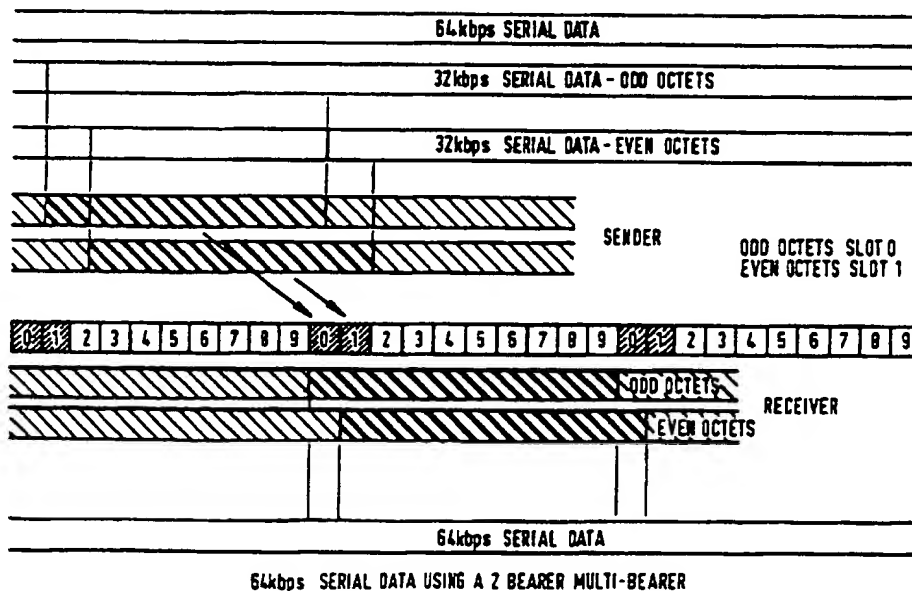

(57) Abstract

In a communication between a base station and subscriber unit in time slots within fixed length time frames, different types of messages require different numbers of time slots per frame to maintain transmission rate. At least a portion of the message is detected to determine the type of message, and if appropriate, additional time slot(s) are assigned.

AO

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LJ	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

Transmission of Digital Data Messages in Digital Telephony

The invention relates to digital data transmission in time slots within fixed length time frames. in particular, time division multiplexing/time division multiple access (TDM/TDMA) digital telephony.

Conventional TDM/TDMA systems, such as GSM ("Global System for Mobile communications") systems are not suited to the transmission of non-speech data and facsimile. As discussed in Cellular Radio Systems. DM Balston & RCV Macario (Editors), Artech House Inc. 1993, Chapter 14, Pages 315 to 323, GSM equipment performs erratically in transmitting Group 3 facsimile signals, and cannot handle Group 4 facsimile. A key problem is the limited bandwidth which is available. Each data or telefax transmission is sent at a conventional rate in a designated slot in successive TDMA frames. Also, ISDN (Integrated Services Digital Network) transmissions require increased bandwidth.

The present invention is defined in the claims, to which reference should now be made.

The present invention preferably provides a method of transmitting a digital data message between a sending unit and a receiving unit using a TDMA data transmission scheme, a slot or slots in successive TDMA frames being assigned for transmission of the message, in which at least a portion of the message is detected to determine a parameter of the message, at least one further slot is selectively assigned for

transmission of the message dependent on said parameter. The message is allocated to the assigned slots for transmission then reconstituted at the receiving unit. The first slot or slots and the further slot or slots are preferably included in each frame.

The number of slots which are used to carry a message can be increased, or decreased, without terminating the call connection between the sending unit and the receiving unit. The effect of adding an additional slot or slots is to provide more bandwidth within which to transmit the message. As the assignment of slots is varied depending on need, it is not necessary to have full knowledge, when a call is first established, of what bandwidth might be required.

Preferably, the sending unit and receiving unit are a base station and subscriber unit. The assignment of slots is preferably undertaken by the base station. When a call is first established, the system does not know whether the message is speech on the one hand, or non-speech voice-band data on the other hand, such as from a modem or facsimile machine, or an ISDN message. Facsimile messages are preferably carried in two slots per frame unless a second slot is unavailable due to the large amount of communication traffic on the system at that time. Using two slots per frame effectively doubles the data transmission rate. ISDN messages are preferably carried on two to five slots per frame, with the corresponding multiplication of transmission rate.

The detection process preferably occurs at the base station to determine the parameter which indicates whether a faster transmission rate is desirable. If so, a decision is made to assign a further slot or slots.

A detection process occurs at the base station to determine whether the message being transmitted in a first slot is speech or voice-band data. A detector at the base station can perform this function, in particular, by detecting whether the message includes standard modem answertone or facsimile handshake or ISDN call set-up signalling or any other characteristic expected if the call includes voice-band data. If this characteristic is detected, a decision to assign an additional slot or slots is made.

The present invention also preferably provides communication means for communicating a digital message using a TDMA data transmission scheme, the communication means including a sending unit and a receiving unit, at least one of said units including first slot assignment means operative to assign a slot in successive TDMA frames, and second slot assignment means operative to selectively assign a second or subsequent slot, the sending unit including means operative to divide the message between the assigned slots, and the receiving unit including means operative to reconstitute the message.

The present invention in another aspect preferably provides a base station comprising transmission means for transmission of TDMA digital data signals and reception means for receiving TDMA digital data signals, the base station including means to assign a first slot in a frame for communication with a subscriber unit, means to detect at least a portion of the transmitted signal to determine a parameter of the transmitted signal and means to selectively assign a second or subsequent slot for communication with the subscriber unit dependent on the sampled parameter.

A preferred embodiment of the invention will now be described, by way of example, with reference to the drawings in which:

Figure 1 is a schematic diagram illustrating the system including a base station (BTE - Base Terminating Equipment) and subscriber unit (NTE - Network Terminating Equipment);

Figure 2 is a diagram illustrating frame structure and timing for a duplex link;

Figure 3 is a diagram illustrating one example of how a digital message is assigned to multiple slots in a TDMA frame;

Figure 4 is a diagram illustrating communications between a base station (BTE - Base Terminating Equipment) and subscriber unit (NTE - Network Terminating Equipment) in assigning a second slot;

Figure 5 is a diagram illustrating communications between a base station (BTE) and subscriber unit (NTE) in re-assigning a second slot which is no longer required.

The Basic System

As shown in Figure 1, the preferred system is part of a telephone system in which the local wired loop from exchange to subscriber has been replaced by a full duplex radio link between a fixed base station (BTE) and fixed subscriber unit (NTE). The preferred system includes the duplex radio link (Air Interface), and transmitters and receivers for

implementing the necessary protocol. There are similarities between the preferred system and digital cellular mobile telephone systems such as GSM which are known in the art. This system uses a protocol based on a layered model, in particular the following layers: PHY (Physical), MAC (Medium Access Control), DLC (DataLink Control), NWK (Network).

One difference compared with GSM is that, in the preferred system, subscriber units are at fixed locations and there is no need for hand-off arrangements or other features relating to mobility. This means, for example, in the preferred system directional antennae and mains electricity can be used.

Each base station in the preferred system provides six duplex radio links at twelve frequencies chosen from the overall frequency allocation, so as to minimize interference between base stations nearby. The frame structure and timing for a duplex link is illustrated in Figure 2. Each duplex radio link comprises an up-link from a subscriber unit to a base station and, at a frequency offset, a down-link from the base station to the subscriber unit. The down-links are TDM, and the up-links are TDMA. Modulation for all links is $\pi/4$ - DQPSK, and the basic frame structure for all links is ten slots per frame of 2560 bits, i.e. 256 bits per slot. The bit rate is 512kbps. Down-links are continuously transmitted and incorporate a broadcast channel for essential system information. When there is no user information to be transmitted, the down-link transmissions continue to use the basic frame and slot structure and contain a suitable fill pattern.

For both up-link and down-link transmissions, there are two types of slot: normal slots which are used after call set-up, and pilot slots used during call set-up.

Each down-link normal slot comprises 24 bits of synchronisation information followed by 24 bits designated S-field which includes an 8 bit header followed by 160 bits designated D-field. This is followed by 24 bits of Forward Error Correction and an 8 bit tail, followed by 12 bits of the broadcast channel. The broadcast channel consists of segments in each of the slots of a frame which together form the down-link common signalling channel which is transmitted by the base station, and contains control messages containing link information such as slot lists, multi-frame and super-frame information, connectionless messages, and other information basic to the operation of the system.

During the call set-up, each down-link pilot slot contains frequency correction data and a training sequence for receiver initialisation, with only a short S- field and no D- field information.

Up-link slots basically contain two different types of data packet. The first type of packet, called a pilot packet, is used before a connection is set up, for example, for an ALOHA call request and to allow adaptive time alignment. The other type of data packet, called a normal packet, is used when a call has been established and is a larger data packet, due to the use of adaptive time alignment.

Each up-link normal packet contains a data packet of 244 bits which is preceded and

followed by a ramp of 4 bits duration. The ramps and the remaining bits left of the 256 bit slot provide a guard gap against interference from neighbouring slots due to timing errors. Each subscriber unit adjusts the timing of its slot transmissions to compensate for the time it takes signals to reach the base station. Each up-link normal data packet comprises 24 bits of synchronisation data followed by an S-field and D-field of the same number of bits as in each down-link normal slot.

Each up-link pilot slot contains a pilot data packet which is 192 bits long preceded and followed by 4 bit ramps defining an extended guard gap of 60 bits. This larger guard gap is necessary because there is no timing information available and without it the propagation delays would cause neighbouring slots to interfere. The pilot packet comprises 64 bits of sync followed by 104 bits of S-field which starts with an 8 bit header and finishes with a 16 bit Cyclic Redundancy Check, 2 reserved bits, 14 FEC bits, and 8 tail bits. There is no D-field.

The S-fields in the above mentioned data packets can be used for two types of signalling. The first type is MAC signalling (MS) and is used for signalling between the MAC layers of the base station and the MAC layer of a subscriber unit whereby timing is important. The second type is called associated signalling, which can be slow or fast and is used for signalling between the base station and subscriber units in the DLC or NWK layers.

The D-field is the largest data field, and in the case of normal telephony contains digitised speech samples, but can also contain non-speech data samples.

Provision is made in the preferred system for subscriber unit authentication using a challenge response protocol. General encryption is provided by combining the speech or data with a non-predicable sequence of cipher bits produced by a key stream generator which is synchronised to the transmitted super-frame number.

In addition, the transmitted signal is scrambled to remove dc components.

Multi-Bearer Operation

Data, such as digitised speech, is carried at a rate of 32 Kbps per slot of a TDMA frame. In cases where a faster rate is required, n -slots in each frame are used, giving a rate of $n \times 32\text{Kbps}$. Each assigned slot can be considered to be a message bearer. Thus, when more than one slot per frame is assigned to a connection, the connection is designated a multi-bearer.

Multi-bearer operation is used to transmit voice-band non-speech data such as facsimile and modem data signals. These use 64 Kbps PCM coding. This data is sent via two slots per frame.

As shown in Figure 3, a 64 Kbps data stream for transmission is divided into two 32 Kbps data streams to be transmitted in different slots. Alternate octets (8 bits) are assigned to different slots, e.g. odd octets to slot 0 and even octets to slot 1. The octets within a $n \times 160$ bit sampling window are considered as successively numbered. Any pair of slots besides slots 0 and 1 can, of course, be chosen to carry the data, including slot 0 on two different RF carriers. At the receiver, the odd and even received octets

are interleaved to reconstitute the original 64 Kbps message.

A multi-bearer connection is established, either by first establishing a single bearer connection, and then increasing the number of bearers, or paging the subscriber unit with a multi-bearer page request message. The paging procedure is similar to that for establishing a single bearer connection; however, the paging message contains the bearer requirements for the entire connection and can assign up to six slots as bearers.

Creation of a Multi-Bearer Connection

During a connection it may be necessary to increase or decrease the number of bearers used. An example is where following the detection of a voice-band data modem call, a second bearer needs to be allocated. This is done by the base station, which adds the new bearers.

Figure 4 illustrates the protocol for adding bearers to a connection. In that figure, and in Figure 5, the following abbreviations are used: Cpte - complete; Ack - acknowledge; no -number; MS - MAC Signalling.

Data is transmitted over the preferred system in a layered protocol similar to that used in GSM. When required, a decision is made in the upper NETWORK layer to provide a 64 Kbps PCM service. An Add-Bearer message is then sent via any established bearer indicating the bearer to be added. There is then a training sequence on each new bearer, and once completed, an Enable-Service message is sent by the base station to the subscriber unit and this is acknowledged by the subscriber unit. Receiver muting is

applied whilst the new bearers are being added. The base station then sends an Enable-Service-Cpte message to the subscriber, which removes the muting. Once the subscriber ceases sending the acknowledgement signal to send another MS-Idle to the base station, the base station responds by removing the mute and the new multi-bearer service is then fully enabled.

Reducing the Number of Bearers in a Multi-Bearer

To release a bearer which is no longer required, a decision is made in the NETWORK layer of the layered protocol. The new bearers to be used are identified, and bearers which have become redundant are released. Figure 5 shows example control messages which are sent between the subscriber unit and base station.

CLAIMS

1. A method of transmitting a digital data message in time slots within fixed length time frames between a sending unit and a receiving unit, a time slot or slots in successive frames being assigned for transmission of the message, in which at least a portion of the message is detected to determine a parameter of the message, and selectably at least one further slot is assigned for transmission of the message dependent on said parameter.
2. A method of transmitting a digital data message according to claim 1, by radio.
3. A method of transmitting a digital data message according to claim 1 or claim 2, in which the message is allocated to the assigned slots for transmission and reconstituted after reception at the receiving unit.
4. A method of transmitting a digital data message according to any preceding claim, in which the first slot or slots and the further slot or slots are included in each frame.
5. A method of transmitting a digital data message according to any of claims 1 to 4, in which the number of slots which are used to carry a message is increased or decreased without terminating a call connection between the sending unit and the receiving unit.
6. A method of transmitting a digital data message according to any

preceding claim, in which the sending unit is a base station and the receiving unit is a subscriber unit.

7. A method of transmitting a digital data message according to claim 6, in which assignment of slots is undertaken by the base station.

8. A method of transmitting a digital data message according to any preceding claim, in which selectably at least one further slot is assigned dependent upon whether the message comprises speech, or non-speech voice-band data.

9. A method of transmitting a digital data message according to claim 8, in which non-speech voice-band data is modem data, facsimile data or an ISDN message.

10. A method of transmitting a digital data message according to any preceding claim, in which a second slot is assigned for carrying a facsimile message such that two slots per frame are used for carrying the facsimile message unless a second slot is unavailable due to the large amount of communication traffic at that time.

11. A method of transmitting a digital data message according to any preceding claim, in which at least one further slot is assigned such that ISDN message are carried on between two and five slots per frame.

12. A method of transmitting a digital data message according to any preceding claim, in which the steps of detection to determine the parameter and further

slot assignment are undertaken at the sending unit.

13. A method of transmitting a digital data message according to any preceding claim, in which the detection step includes determining whether the message includes a characteristic expected if the call includes voice-band data.

14. A method of transmitting a digital data message according to any preceding claim, in which the characteristic is standard modem answertone or facsimile handshake signalling or ISDN call set-up signalling.

15. Communication means for communicating a digital data message in time slots within fixed length time frames, the communication means including a sending unit and a receiving unit, at least one of said units including first slot assignment means operative to assign a time slot or slots in successive frames, and at least one of said units including second slot assignment means operative to selectively assign at least one further slot, the second slot assignment means including detection means to detect at least a portion of the message to determine a parameter of the message and including assignment means to selectively assign said at least one further slot dependent on the parameter, the sending unit including means operative to divide the message between the assigned slots, and the receiving unit including means operative to reconstitute the message.

16. Communication means according to claim 15, in which the sending unit sends by radio.

17. Communication means according to claim 15 or claim 16, in which the receiving unit is at a fixed location.



18. Communication means according to any of claims 15 to 17, in which the sending unit is a base station and the receiving unit is a subscriber unit.

19. Communication means according to claim 18, in which the base station comprises the second slot assignment means.

20. A base station comprising transmission means for transmission of digital data signals in time slots of fixed length time frames and reception means for receiving digital data signals in corresponding time slots of fixed length time frames, the base station including means to assign a slot or slots in a frame for communication with a subscriber unit, means to detect at least a portion of the transmitted signal to determine a parameter of the transmitted signal and means to selectively assign at least one further slot for communication with the subscriber unit dependent on the parameter.

21. A base station according to claim 20, operative to transmit TDM digital data signals and receive TDMA digital data signals.

1 / 4

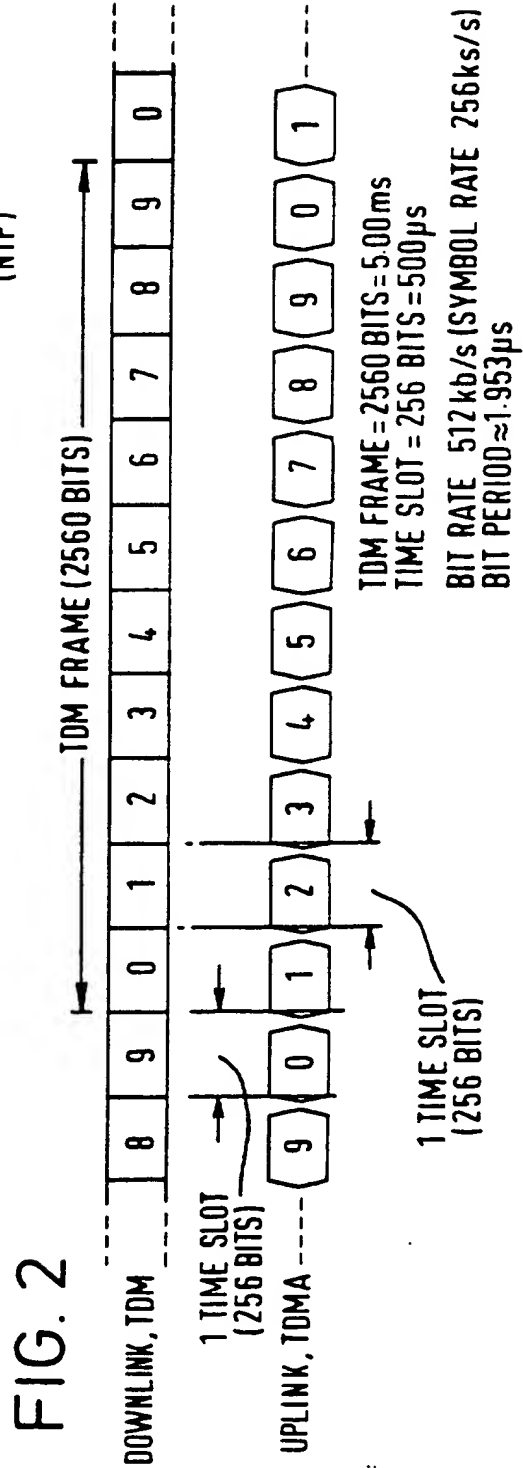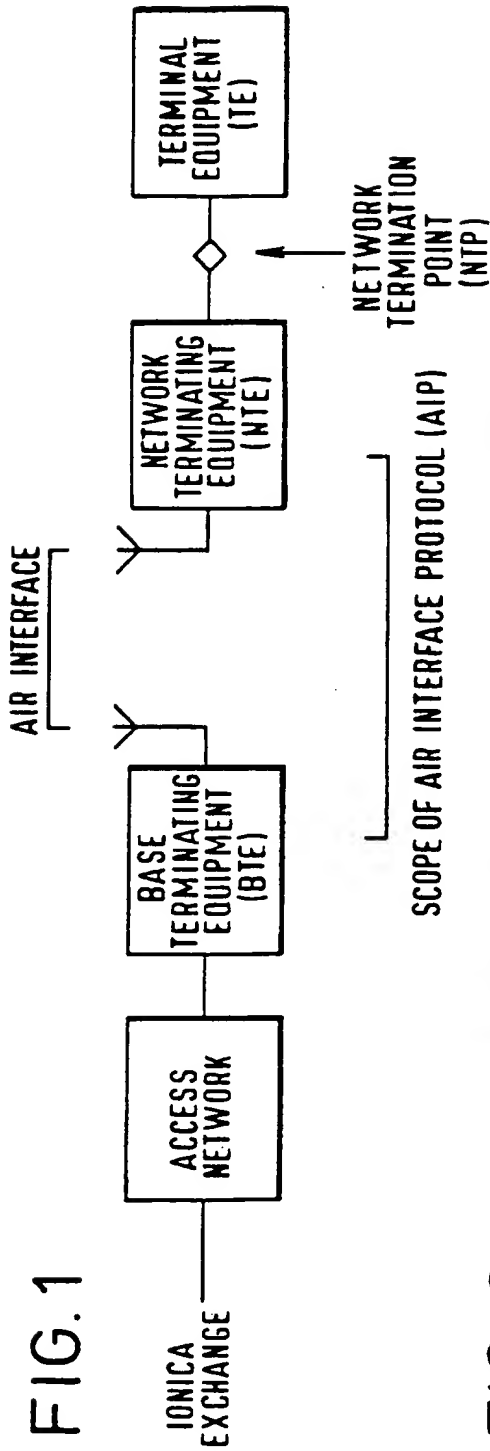

2 / 4


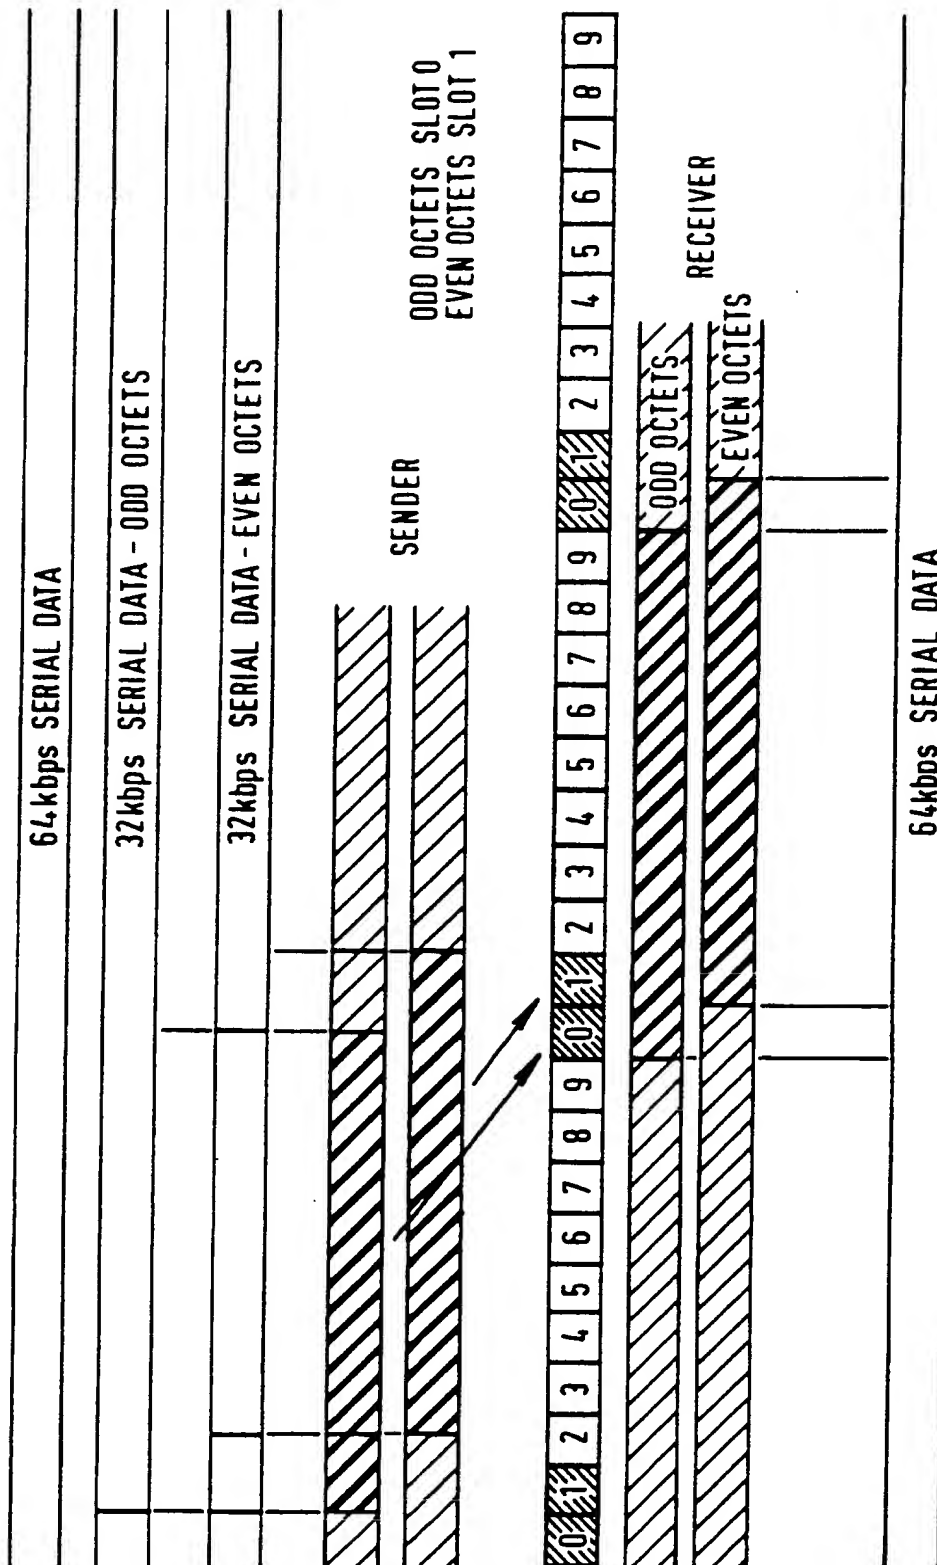



FIG. 3

64kbps SERIAL DATA USING A 2 BEARER MULTI-BEARER

3 / 4

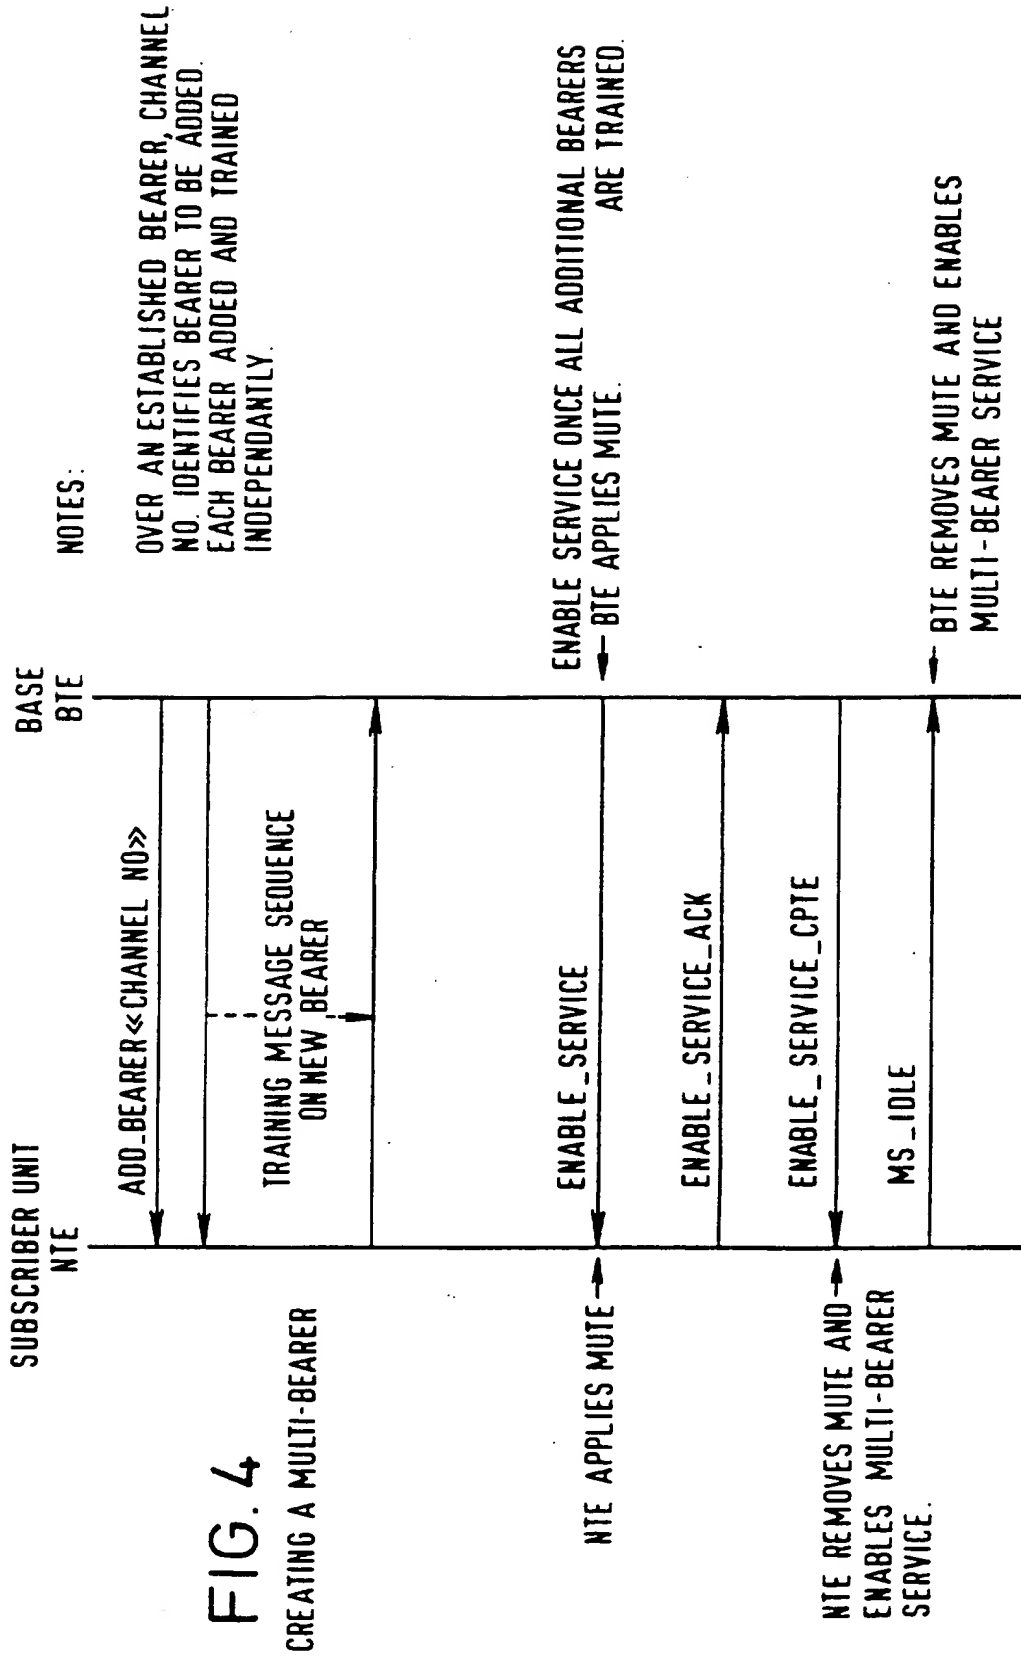

6 / 6

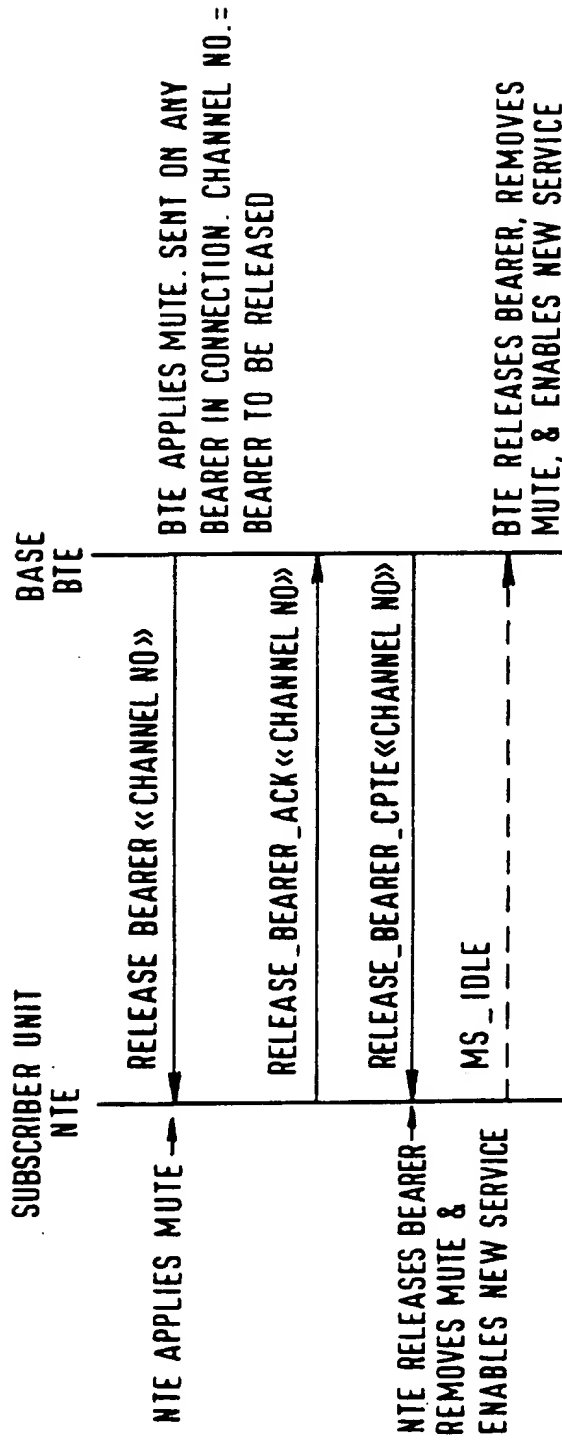

REDUCING A MULTI-BEARER

FIG. 5


PCTWORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H04Q 7/22		A3	(11) International Publication Number: WO 96/08934
			(43) International Publication Date: 21 March 1996 (21.03.96)
(21) International Application Number: PCT/GB95/02134			(81) Designated States: AM, AT, AU, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TT, UA, UG, US, UZ, VN, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG), ARIPO patent (KE, MW, SD, SZ, UG).
(22) International Filing Date: 8 September 1995 (08.09.95)			
(30) Priority Data: 9418780.4 16 September 1994 (16.09.94) GB			
(71) Applicant (for all designated States except US): IONICA INTERNATIONAL LIMITED [GB/GB]; Cowley Road, Cambridge CB4 4AS (GB).			
(72) Inventors; and (75) Inventors/Applicants (for US only): ALBROW, Richard, John [GB/GB]; 27 Lonsdale, Linton, Cambridge CB1 6LT (GB). BLACK, Simon, Alexander [GB/GB]; 52 Auckland Court, Auckland Road, Cambridge CB5 8DS (GB). CARTER, Leigh [AU/GB]; 50 Cantelupe Road, Haslingfield, Cambridge CB3 7LU (GB). GOODINGS, Rupert, Leslie, Alexander [GB/GB]; 33 Elizabeth Way, Cambridge CB4 1DD (GB). MARTIN, Paul, Maxwell [GB/GB]; 9 Taylors Field, Dullingham, Newmarket, Suffolk CB8 9XS (GB). PIERCY, Neil, Philip [GB/GB]; 13 Harston Road, Newton, Cambridge CB2 5PA (GB).			
(74) Agent: HOGG, Jeffery, Keith; Withers & Rogers, 4 Dyer's Buildings, Holborn, London EC1N 2JT (GB).			(88) Date of publication of the international search report: 18 April 1996 (18.04.96)

Published*With international search report.**Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.*

(54) Title: TRANSMISSION OF DIGITAL DATA MESSAGES IN DIGITAL TELEPHONY

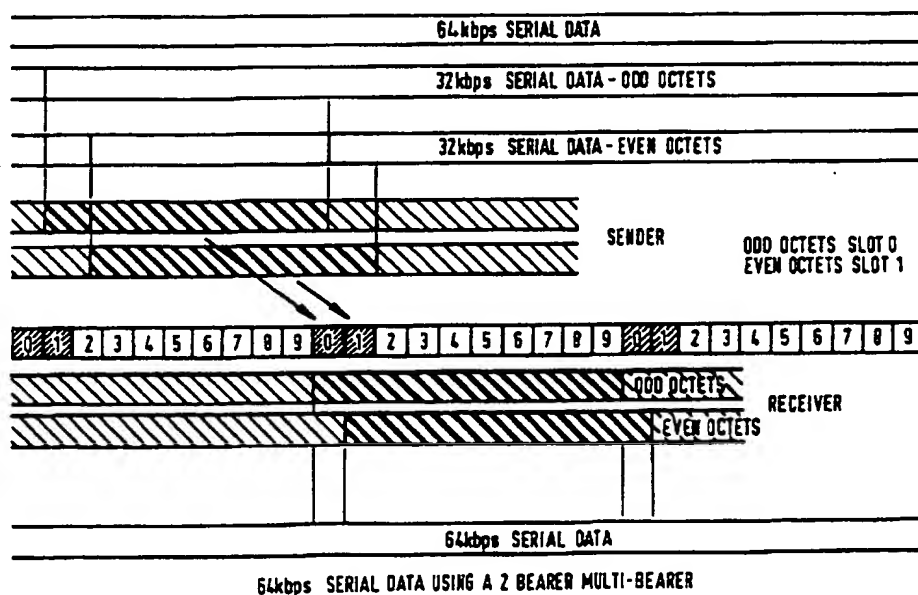

(57) Abstract

In a communication between a base station and subscriber unit in time slots within fixed length time frames, different types of messages require different numbers of time slots per frame to maintain transmission rate. At least a portion of the message is detected to determine the type of message, and if appropriate, additional time slot(s) are assigned.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB 95/02134

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 H04Q7/22

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 H04Q H04B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X,P	US,A,5 446 739 (NAKANO ET AL.) 29 August 1995 see column 4, line 26 - line 33 see column 6, line 1 - line 34 see column 9, line 15 - column 10, line 3	1-4,15, 16,20,21
X	& CA,A,2 112 762 (KABUSHIKI KAISHA TOSHIBA) 7 July 1994 ---	1-4,15, 16,20,21
A	EP,A,0 399 611 (PHILIPS ELECTRONIC AND ASSOCIATED INDUSTRIES LIMITED ET AL.) 28 November 1990 see column 5, line 39 - column 7, line 8 --- -/--	1-6,11, 15-18, 20,21

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

A document defining the general state of the art which is not considered to be of particular relevance

E earlier document but published on or after the international filing date

L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

O document referring to an oral disclosure, use, exhibition or other means

P document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

& document member of the same patent family

Date of the actual completion of the international search

20 February 1996

Date of mailing of the international search report

01.03.96

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-1016

Authorized officer

Behringer, L.V.

INTERNATIONAL SEARCH REPORT

Inter. Application No
PCT/GB 95/02134

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>ICC '93 GENEVA. IEEE INTERNATIONAL CONFERENCE ON COMMUNICATIONS '93, vol. 1, 23 - 26 May 1993 GENEVA CH, pages 172-176, XP 000371088 W.-C.WONG ET AL. 'Integrated data and speech transmission using packet reservation multiple access' see page 173, left column, line 29 - right column, line 35</p> <p style="text-align: center;">-----</p>	<p>1,2,4,6, 7,12,15, 16,18-21</p>

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/GB 95/02134

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US-A-5446739	29-08-95	JP-A- 6204943 CA-A- 2112762	22-07-94 07-07-94

EP-A-0399611	28-11-90	GB-A- 2232326 JP-A- 3050926 US-A- 5200956	05-12-90 05-03-91 06-04-93
